

HP0-Y32

HP

Designing and Troubleshooting Open Standard Networks

Visit: <http://www.pass4sureofficial.com/exams.asp?examcode=HP0-Y32>

Pass4sureofficial.com is a reputable IT certification examination guide, study guides and audio exam provider, we not only ensure that you pass your HP0-Y32 exam in first attempt, but also you can get a high score to acquire HP certification.

If you use pass4sureofficial HP0-Y32 Certification questions and answers, you will experience actual HP0-Y32 exam questions/answers. We know exactly what is needed and have all the exam preparation material required to pass the exam. Our HP exam prep covers over 95% of the questions and answers that may be appeared in your HP0-Y32 exam. Every point from pass4sure HP0-Y32 PDF, HP0-Y32 review will help you take HP HP0-Y32 exam much easier and become HP certified. All the Questions/Answers are taken from real exams.

Here's what you can expect from the Pass4sureOfficial HP HP0-Y32 course:

- * Up-to-Date HP HP0-Y32 questions taken from the real exam.
- * 100% correct HP HP0-Y32 answers you simply can't find in other HP0-Y32 courses.
- * All of our tests are easy to download. Your file will be saved as a HP0-Y32 PDF.
- * HP HP0-Y32 brain dump free content featuring the real HP0-Y32 test questions.

HP HP0-Y32 certification exam is of core importance both in your Professional life and HP certification path. With HP certification you can get a good job easily in the market and get on your path for success. Professionals who passed HP HP0-Y32 exam training are an absolute favorite in the industry. You will pass HP HP0-Y32 certification test and career opportunities will be open for you.



Exam Name:	Designing and Troubleshooting Open Standard Networks		
Exam Type:	HP	Exam Code:	HP0-Y32
Certification	Accredited Systems Engineer (ASE)	Total Questions:	74

Question: 1

Click the Exhibit button.

<u>Core 1</u>	<u>Core 2</u>
Running configuration:	Running configuration:
; J8697A Configuration Editor; Created on release #K.14.65	; J8697A Configuration Editor; Created on release #K.14.65
hostname "Core 1" module 1 type J8702A trunk A1-A2 Trk1 Trunk snmp-server community "public" Unrestricted vlan 1 name "DEFAULT_VLAN" untagged A3-A9 ip address 10.0.0.1 255.255.255.0 no untagged A10-A24,Trk1 exit vlan 20 name "VLAN20" untagged A10-A24 tagged Trk1 ip address 10.20.0.1 255.255.255.0 exit	hostname "Core 2" module 1 type J8702A trunk A1-A2 Trk1 Trunk snmp-server community "public" Unrestricted vlan 1 name "DEFAULT_VLAN" untagged A3-A9 ip address 10.0.1.1 255.255.255.0 no untagged A10-A24,Trk1 exit vlan 20 name "VLAN20" untagged A10-A24 tagged Trk1 ip address 10.20.0.2 255.255.255.0 exit

You install two E5400 zl Series switches and connect them with a two-port static trunk. All hosts on both switches are in VLAN 20. However, some hosts on Core 1 cannot ping some hosts on Core 2 and vice versa. All hosts can ping all hosts on their own switch. Event logs on the two switches do not show significant errors. What should you do to determine the cause of this connectivity issue? (Select three.)


- A. Use traceroute to determine which device is dropping the ping packets.
- B. Verify the trunk configuration on each core switch.
- C. Change the IP address for the default VLAN on Core 2 so that it is in the same subnet as the default VLAN on Core 1.
- D. Verify physical connectivity between the switches.
- E. Use LLDP to check the identities of the devices and their neighbors.

Answer: B, D, E

Question: 2

Click the Exhibit button.

Exam Name:	Designing and Troubleshooting Open Standard Networks		
Exam Type:	HP	Exam Code:	HP0-Y32
Certification	Accredited Systems Engineer (ASE)	Total Questions:	74

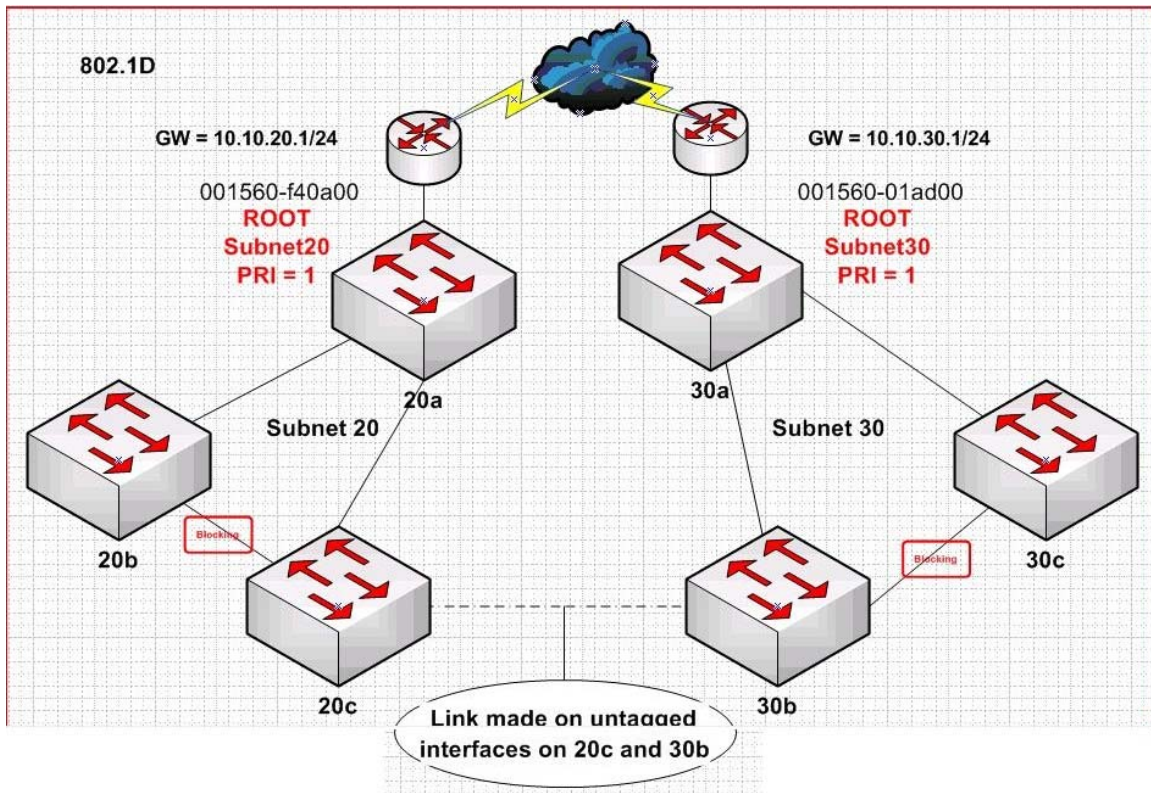

A user adds an untagged link between switch 20c and 30b. What is the impact of the user's actions?

- A. Internet connectivity to subnet 20 users is broken.
- B. STP Root Bridge of Subnet 20 moves.
- C. All Subnet 20 traffic is routed through Subnet 30.
- D. STP alternate path selection remains unchanged.

Answer: B

Question: 3

What does a monitor link on an HP A-Series switch allow the switch to do?

- A. check whether an uplink is up and, if it is not, disable a downlink to a server with a redundant link to another switch
- B. check whether a link to an uplink switch is up and, if it not, enable another uplink
- C. check whether it can reach a remote IP address and, if it cannot, lower its priority as a Virtual Router Redundancy Protocol (VRRP) Master
- D. check whether it can reach a remote IP address and, if it cannot, send an SNMP trap or email notification

Answer: A

Question: 4

You are configuring a link aggregation between an HP E-5400 zI Series switch at the access layer and a Cisco switch at the aggregation layer. What is one valid reason for using static LACP instead of dynamic LACP?

Exam Name:	Designing and Troubleshooting Open Standard Networks		
Exam Type:	HP	Exam Code:	HP0-Y32
Certification	Accredited Systems Engineer (ASE)	Total Questions:	74

- A. Cisco's implementation of dynamic LACP is not industry standard.
- B. Cisco switches transmit dynamic LACP frames as tagged in the link aggregation's native VLAN, but HP E-Series switches expect untagged frames.
- C. HP E-Series switch link aggregations can only receive VLAN assignments through GVRP when they implement dynamic LACP.
- D. HP E-Series switches require one side of a dynamic LACP link to operate in passive mode, but Cisco switches support only active mode for dynamic LACP.

Answer: C

Question: 5

Using Intelligent Resilient Framework (IRF), you configure two switches to act as a single switch for reasons of resiliency and capacity. You install a cable between the devices connecting their IRF ports. However, the virtual IRF device is still not working. You verify the cable and the physical ports, but cannot get the devices to function. What are possible reasons why the virtual device not working?

- A. The IRF devices do not have unique Member IDs.
- B. The fabric names are the same within the IRF fabric.
- C. IRF active command has not been executed.
- D. The devices are running the same major revision of firmware, but different minor revisions.

Answer: C

Question: 6

On an HP A-Series router, you have configured dynamic Network Address Translation (NAT) for IP addresses in the 10.1.0.0/20 range. You have also configured static NAT to permit outside users to connect to various services in the 10.1.14.0/24 subnet. You have also applied a connection limit policy with this rule: limit 0 acl 3001 per-destination amount 800 100ACL 3001 selects 10.1.14.0/24 destination addresses. What is the function of the connection limit policy?

- A. Devices within the 10.1.14.0/24 are allowed to establish between 100 and 800 connections. Other devices in the 10.1.0.0/20 range are banned from NAT.
- B. Devices within the 10.1.14.0/24 are allowed to establish between 100 and 800 connections. Other devices in the 10.1.0.0/20 range have NAT applied to them with no limit.
- C. Outside devices are allowed to make only 100 to 800 connections to devices in the 10.1.14.0/24 range. No limit applies to other devices in the 10.1.0.0/20 range.
- D. Outside devices are allowed to make only 100 to 800 connections to devices in the 10.1.14.0/24 range. They cannot make connections to other devices in the 10.1.0.0/20 range.

Answer: C

Question: 7

You choose to configure Intelligent Resilient Framework (IRF) on your two HP A-Series switches. Which advantages does this feature offer? (Select three.)

- A. IRF can use a track to bind a priority reduction to connectivity to an ISP router, providing intelligent selection of the master.
- B. IRF enables the switches to share a virtual IP address and maintain their own IP addresses as well.
- C. IRF provides authentication to prevent unauthorized devices from becoming part of the group.
- D. IRF provides failover for Network Address Translation (NAT) sessions.
- E. IRF offers full load balancing for Layer 2 and Layer 3 traffic on link aggregations that can span both switches.

Exam Name:	Designing and Troubleshooting Open Standard Networks		
Exam Type:	HP	Exam Code:	HP0-Y32
Certification	Accredited Systems Engineer (ASE)	Total Questions:	74

Answer: C, D, E

Question: 8

Your LAN uses a private network addressing scheme, and you own a single public IP address that all devices share on the Internet. How do you configure Network Address Translation (NAT) on an HP A-Series router to support this implementation?

- A. Select the private IP addresses in an ACL and apply outbound NAT to the ACL on the router's Internet-facing interface.
- B. Configure a server NAT policy that selects the private IP addresses and associates them with an outbound interface.
- C. Create two ACLs, one with the private IP addresses and one with the public IP address. Associate the ACLs in a global many-to-one NAT policy.
- D. Select the private IP addresses in an ACL and apply source NAT to the ACL on the router's LAN-facing interface.

Answer: A

Question: 9

Click the Exhibit button.

Config Router #1

```
ospf 3
 area 0.0.0.0
 area 0.0.0.2
  network 100.100.100.0 0.0.0.255
 stub
```

Config Router #2

```
ospf 4
 import-route direct
 area 0.0.0.2
  network 100.100.100.0 0.0.0.255
  network 200.200.200.0 0.0.0.255
 stub

interface LoopBack1
 ip address 10.10.10.10 255.255.255.255
```

Two HP A-Series Routers are connected together. The route for 10.10.10.10/32 does not show up in Router #1. Why?

- A. Router 2 must be in Area 0.
- B. Area 2 is a stub area and cannot redistribute routes.
- C. Loopback interfaces cannot be announced by OSPF.
- D. There is a mismatch in the OSPF process IDs.

Answer: B

Pass4SureOfficial.com Lifetime Membership Features;

- Pass4SureOfficial Lifetime Membership Package includes over **2500** Exams.
- **All** exams Questions and Answers are included in package.
- **All** Audio Guides are included **free** in package.
- **All** Study Guides are included **free** in package.
- **Lifetime** login access.
- Unlimited download, no account expiry, no hidden charges, just one time \$99 payment.
- **Free updates** for Lifetime.
- **Free Download Access** to All new exams added in future.
- Accurate answers with explanations (If applicable).
- Verified answers researched by industry experts.
- Study Material **updated** on regular basis.
- Questions, Answers and Study Guides are downloadable in **PDF** format.
- Audio Exams are downloadable in **MP3** format.
- **No authorization** code required to open exam.
- **Portable** anywhere.
- 100% success **Guarantee**.
- **Fast**, helpful support 24x7.

View list of All exams (Q&A) downloads

<http://www.pass4sureofficial.com/allexams.asp>

View list of All Study Guides (SG) downloads

<http://www.pass4sureofficial.com/study-guides.asp>

View list of All Audio Exams (AE) downloads

<http://www.pass4sureofficial.com/audio-exams.asp>

Download All Exams Samples

<http://www.pass4sureofficial.com/samples.asp>

To purchase \$99 Lifetime Full Access Membership click here

<http://www.pass4sureofficial.com/purchase.asp>

3COM	CompTIA	Filemaker	IBM	LPI	OMG	Sun
ADOBE	ComputerAssociates	Fortinet	IISFA	McAfee	Oracle	Sybase
APC	CWNP	Foundry	Intel	McData	PMI	Symantec
Apple	DELL	Fujitsu	ISACA	Microsoft	Polycom	TeraData
BEA	ECCouncil	GuidanceSoftware	ISC2	Mile2	RedHat	TIA
BICSI	EMC	HDI	ISEB	NetworkAppliance	Sair	Tibco
CheckPoint	Enterasys	Hitachi	ISM	Network-General	SASInstitute	TruSecure
Cisco	ExamExpress	HP	Juniper	Nokia	SCP	Veritas
Citrix	Exin	Huawei	Legato	Nortel	See-Beyond	Vmware
CIW	ExtremeNetworks	Hyperion	Lotus	Novell	SNIA	

